


Dimensions:220*110mm

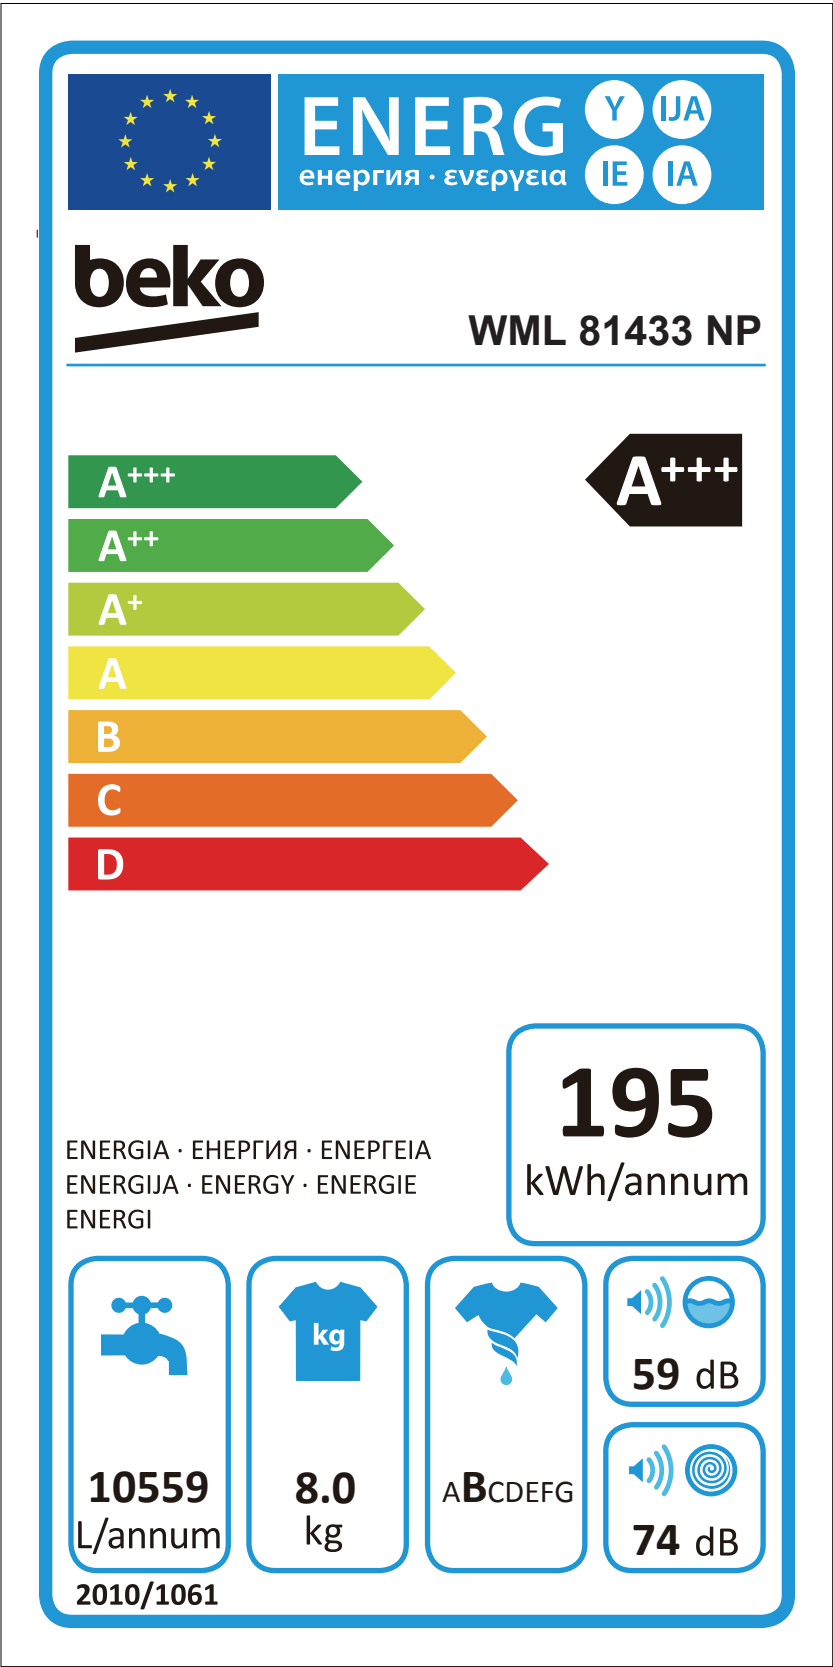

技术要求

- 1,标贴背面涂不干胶,并贴保护纸,粘接牢固,不卷边;
- 2,字迹清晰,用溶剂及酒精擦拭,15秒后不被擦去;
- 3,颜色,字体,字样,位置等按本图制作;
- 4,工作温度<100° C
- 5,外框b不需要印刷
- 6,颜色标准CMYK,C表示青色，M表示红，Y表示黄，K表示黑
- 7,尺寸：220*110
- 8,放在说明书包装袋中。

TECHNICAL REQUIREMENT

- 1、Back of energy label past adhesive glue,and protective paper,carefully pasted and no warping.
- 2、The words should be clear,we use alcohol and solvent to erase the words for 15s, and the words should still remains.
- 3、Color of font ,the type of words should be made according to this drawings.
- 4、Temperature<100 °C
- 5、Frame don't print
- 6、color standard CMYK,C-cyan,M-red,Y-yellow, K-black
- 7、dimensions：220*110
- 8、In the IB polybag.

借(通)用件登记

描 图

描 校

底图总号

签 字

日 期

								beko	Material 铜版纸 Art paper						
										节能标贴 energylabel					
								DATE	NAME						
											PART NO.				SCALE 1/1
								the tolerances standard:		Mat. Class	Mat. Order No.	Type	Srd. Change		
									23	0321	09	64	PAGE NO. 1		
		AA		099-2018	2018.07.10	amy fan		S substitute for - - - - -					TOTAL 1		
Type		R			Date	Prepared N	Approved N								