DDT25401X

Top Control, Pro Handle Dishwasher, 5 Programs, 48 dBA





CEE Tier 1

GENERAL PROPERTIES	
Style	Top Control
Finish	Fingerprint-Free Stainless Steel
Handle	Pro Handle – Rounded Stainless Steel
Connectivity	-
Tub Type	Tall Tub
Tub and Door Liner	Stainless Steel
Control Type	Push Buttons
Toe Kick	Black Plastic
Leveling System	4 Leveling Legs

beko

EFFICIENCY	
Energy Efficiency Class	Tier 1
ENERGY STAR® Certified	Most Efficient
Total Annual Energy Consumption (kWh)	234 kWh/year
Total Annual Water Consumption (g)	2.59 – 5.86 g/cycle



MOST EFFICIENT

Beko dishwashers are ENERGY STAR® Most Efficient. They save water and energy while exceeding the stringent cleanability Index required to receive this designation.

PREMIUM TECHNOLOGY



FULL STAINLESS STEEL TUB

Our stainless steel interior not only resists hard water stains, spots, and corrosion, it's more durable, offers more noise cancellation, and supports higher temperatures than the plastic interiors found in other dishwashers.



SANITIZE FUNCTION

The Sanitize function reaches higher temperatures, provides complete peace of mind, especially for cleaning baby bottles and feeding accessories.



DDT25401X

Top Control, Pro Handle Dishwasher, 5 Programs, 48 dBA

FEATURES

Number of Wash Cycles	5
SilentTech™	48 dBA
CornerIntense®	-
Deep Wash	-
EverClean [™] Filter	-
SelfDry	-
lonGuard	-
Drying System	Static
Interior Illumination	-
DMSF Overflow Protection	Yes
Turbidity Sensor	Yes
Delay Timer	Yes
Detergent & Rinse Aid Dispenser (with Indicator)	Yes
Flood Protection	Yes
Overflow Safety	Yes
Water Softener	-
Watertap Indicator	Yes
LED Spot (Light Indicator on Floor)	Yes
Interior High Loop with Air Gap	Yes
All-In-1 Tablet	Yes
ProSmart Inverter Motor	Yes
NSF®-Certified - Sanitize Option	Yes

CAPAC	ITV
CAFAC	111

Number of Place Settings

TECHNICAL INFORMATION		
Watts (W)	1,400 W	
Current (A)	12 A	
Volts (V)	120 V	
Frequency (Hz)	60 Hz	
Power Cord Full Length	Yes	
Power Cord Install Length from Edge of Unit When Facing the Door	4 ft.	
Minimum Water Pressure (psi)	4.35 - 145	
Length Discharge Hose	6 ft.	

DIMENSIONS & WEIGHT Product H x W x D (in) 32³/16 x 23⁹/16 x 22⁷/16 Required Cutout Dimensions 34 x 24 x 24 $(H \times W \times D)$ Net Weight (lbs) 82.67

ACCESSORIES (INCLUDED)		
Installation Accessory Pack	1784430063	
Toe Kick	1765810101	
Stemware Rack	1752850100	

RACK SYSTEM	
Full Size Third Rack	
Easy Fold Lower Rack Tines	-
Cutlery Basket	Standard, Full-Size
Upper Rack	Standard, 2 Mug Shelves
Easy Fold Upper Rack Tines	-
Height-Adjustable Upper Rack	Yes, 3 positions, When Loaded
Nylon Coated Racks	Yes

WARRANTY		
All Products	2-Year Full Warranty	
ProSmart Inverter Motor	10-Year Warranty – Parts Only	


14



DDT25401X



Top Control, Pro Handle Dishwasher, 5 Programs, 48 dBA

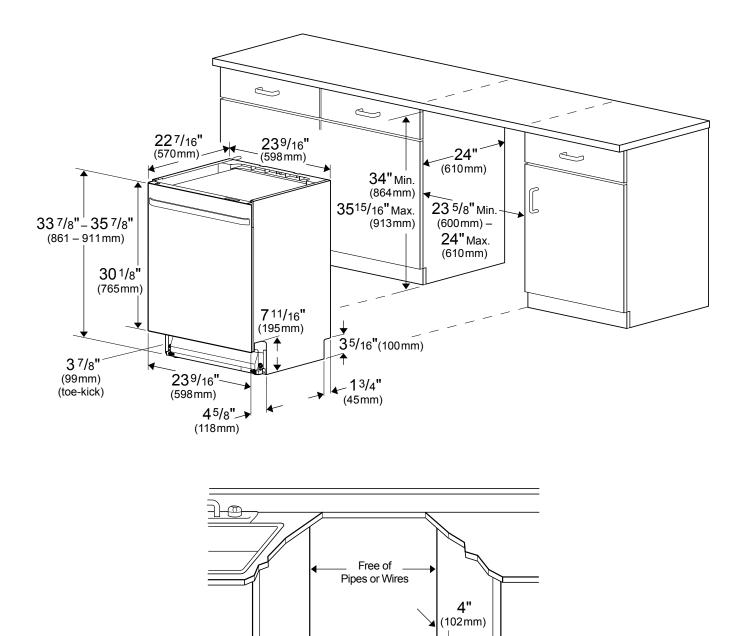

in this area 6" (152mm)

Plumbing and Electric

NOTE TO THE INSTALLER: All height, width, and depth dimensions are shown in inches (as well as metric). Beko U.S., Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website, www.BekoAppliances.com, or call 888.352.2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials, or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.