DIN25401

Top Control, Panel Ready Dishwasher, 5 Programs, 48 dBA



Style	Top Control
Finish	Panel Ready
Handle	_
Connectivity	-
Tub Type	Standard Size
Tub and Door Liner	Stainless Steel
Control Type	Push Buttons
Toe Kick	Black Plastic
Leveling System	4 Leveling Legs

Tier 1

GENERAL PROPERTIES









PREMIUM TECHNOLOGY

EFFICIENCY

Energy Efficiency Class



MOST EFFICIENT

Beko dishwashers are ENERGY STAR® Most Efficient. They save water and energy while exceeding the stringent cleanability Index required to receive this designation.



FULL STAINLESS STEEL TUB

Our stainless steel interior not only resists hard water stains, spots, and corrosion, it's more durable, offers more noise cancellation, and supports higher temperatures than the plastic interiors found in other dishwashers.



SANITIZE FUNCTION

The Sanitize function reaches higher temperatures, provides complete peace of mind, especially for cleaning baby bottles and feeding accessories.



© 2023 Beko U.S., Inc. 5/23

DIN25401



Top Control, Panel Ready Dishwasher, 5 Programs, 48 dBA

FEATURES		CAPACITY
Number of Wash Cycles	5	Number of I
SilentTech™	48 dBA	
CornerIntense®	-	TECHNICAL
Deep Wash	-	Watts (W)
EverClean™ Filter	_	Current (A)
SelfDry	_	Volts (V)
lonGuard	_	Frequency (
Drying System	Static	Power Cord
Interior Illumination	-	Power Cord
DMSF Overflow Protection	Yes	of Unit Whe
Turbidity Sensor	Yes	Minimum W
Delay Timer	Yes	Length Disc
Detergent & Rinse Aid Dispenser (with Indicator)	Yes	DIMENSION
Flood Protection	Yes	Product H x
Overflow Safety	Yes	Required Cu
Water Softener	_	$(H \times W \times D)$
Watertap Indicator	Yes	Net Weight
LED Spot (Light Indicator on Floor)	No	
Interior High Loop with Air Gap	Yes	ACCESSORI
All-In-1 Tablet	Yes	Installation
ProSmart Inverter Motor	Yes	Toe Kick
NSF®-Certified - Sanitize Option	Yes	
DACK SYSTEM	'	Stemware F

RACK SYSTEM	
Full Size Third Rack	_
Easy Fold Lower Rack Tines	_
Cutlery Basket	Standard, Full-Size
Upper Rack	Standard, 2 Mug Shelves
Easy Fold Upper Rack Tines	_
Height-Adjustable Upper Rack	_
Nylon Coated Racks	Yes

Number of Place Settings	14
TECHNICAL INFORMATION	
Watts (W)	1,400 W
Current (A)	12 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power Cord Full Length	Yes
Power Cord Install Length from Edge of Unit When Facing the Door	4 ft.
Minimum Water Pressure (psi)	4.35 - 145
Length Discharge Hose	6 ft.

DIMENSIONS & WEIGHT	
Product H x W x D (in)	32 ³ /16 x 23 ⁹ /16 x 21 ⁵ /8
Required Cutout Dimensions (H x W x D)	34 x 24 x 24
Net Weight (lbs)	80.25


ACCESSORIES (INCLUDED)	
Installation Accessory Pack	1784430062
Toe Kick	1884940400 1884930700 1884920700
Stemware Rack	1752850100

WARRANTY	
All Products	2-Year Full Warranty
ProSmart Inverter Motor	10-Year Warranty – Parts Only

DIN25401



Top Control, Panel Ready Dishwasher, 5 Programs, 48 dBA

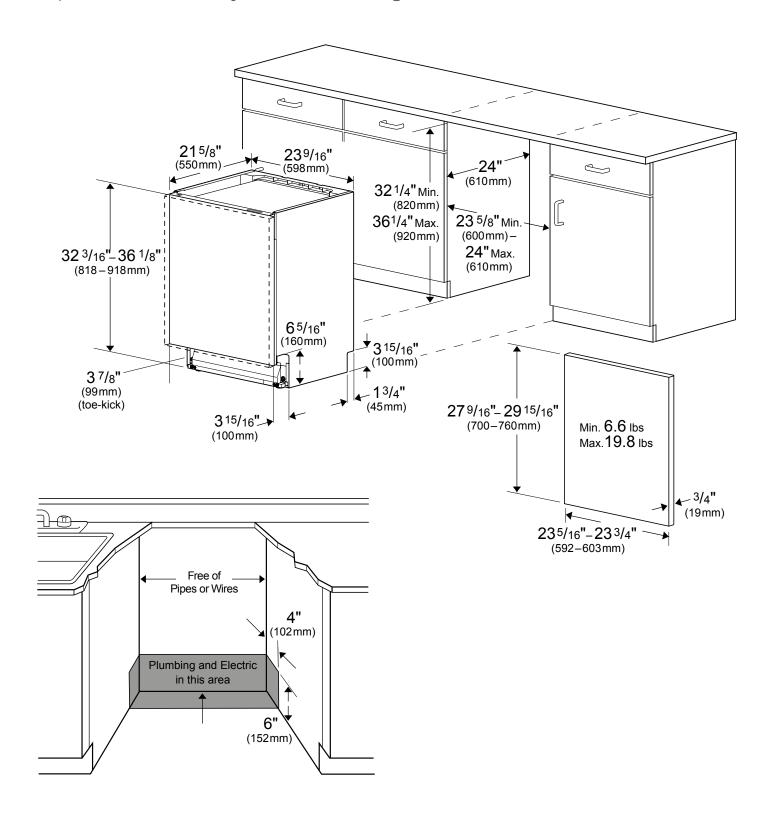

NOTE TO THE INSTALLER: All height, width, and depth dimensions are shown in inches (as well as metric). Beko U.S., Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website, www.BekoAppliances.com, or call 888.352.2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials, or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.